

Well Completion Packages



OEG Offshore is a trusted partner to the offshore energy sector with over 50 years of heritage. We provide safe, high quality, and reliable solutions for many challenging offshore applications throughout the industry.

Blue Manta, an OEG Offshore company offers packaged rental solutions to support completions and workover operations with standard and bespoke spooling units, sheave wheels, pressure test equipment and associated services.

We are uniquely positioned to deliver equipment required for deploying assorted lines (including control line, ESP cables and electric line) primarily on a rental basis. This includes spooling units, sheave wheels, cargo baskets and workshop containers, all of which are designed and manufactured to meet the latest industry standards.

Well Completion Packages

TAILORED EQUIPMENT SOLUTIONS TO SUPPORT COMPLETIONS AND WORKOVER OPERATIONS.


Units are available to suit drum diameters from 30" to 96", and have a range of accessories including hydraulic slip rings, electrical collectors, winder systems and remote control panels.

We can supply standard spooling units on a rental basis and also bespoke units designed to meet customer requirements.

Spooling Units are predominantly used to deploy lines and cables, including control lines and various electrical lines including ESP and gauge lines.

The units operate by creating back tension which stops the spool from free running and keeps the line tight.

All of Blue Manta's spooling units are manufactured and designed in accordance with DNV 2.7-1 and EN 12079 standards and fully guarded to meet PUWER Regulations.

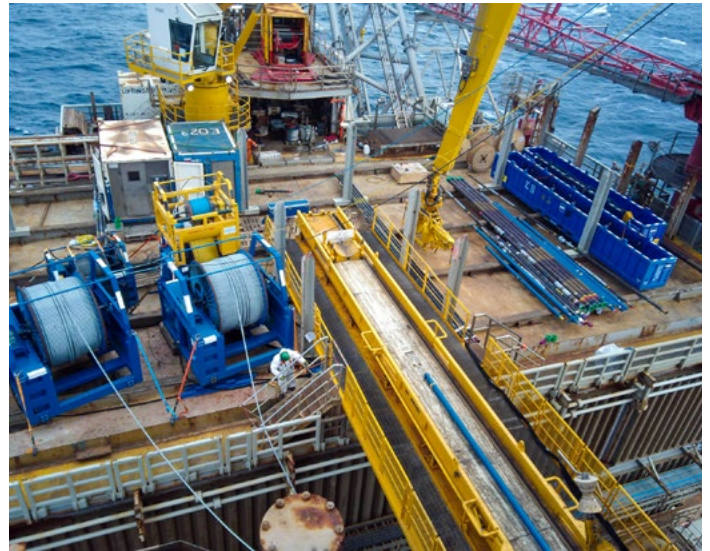

MODEL NO.	MAXIMUM DRUM SIZE			EXTERNAL DIMENSIONS (MM)			WEIGHTS (KGS)		
	DIA	WIDTH	SHAFT				TARE	PAYLOAD	MGW
02-3000	32"	18"	2" or 3"	3' 6" (1060)	3' 4" (1020)	4' 5" (1350)	600	900	1500
02-3600	36"	30"	3"	4' 11" (1500)	3' 11" (1200)	4' 8" (1425)	700	1300	2000
02-4000	40"	34"	3"	5' 4" (1630)	4' 4" (1350)	5' (1535)	1000	3500	4500
02-5000	50"	48"	3"	6' 6" (1985)	5' (1535)	6' (1825)	1200	5000	6200
02-5500	55"	48"	3"	6' 6" (1985)	5' 5" (1910)	6' 1" (1839)	1300	7000	8300
02-6500	65"	48"	3" or 4"	7' 1" (2150)	6' 3" (1910)	6' 7" (2010)	1600	8400	10,000
02-7500	75"	57"	3" or 4"	7' 10" (2400)	8' (2435)	7' 5" (2275)	2000	9000	11,000
02-8500	82"	62"	4"	9' 2" (2800)	7' 8" (2350)	7' 5" (2260)	2300	10,200	12,500
02-9600	96"	64"	4"	9' 2" (2800)	10' 3" (3140)	9' 9" (2975)	2500	12,000	14,500

E & OE: All dimensions and weights are accurate at the time of creation. Please check exact specifications of units when ordering.